

 **SMARTFORK**[®]

SmartFork[®] Scale WeighingForks

The new dimension of weighing

WEIGHING WITH
LOAD CENTER
DISPLAY





EXCLUSIVELY AT VETTER!



SmartFork® Scale display:
load center indication

SmartFork® Scale WeighingForks



Weight detection and display of load center



Wireless data transfer, quick installation



Digital display with touch function,
user interface individually programmable



Intuitive adjustment menu



Rechargeable battery made by BOSCH



SmartEnergy: automatic deactivation during
standstill (energy-saving mode)



Integrated tilt sensor to detect oblique
positions



Every conceivable fork suspension



Combinable with SmartFork® applications



Easy IT-connection (printer, scanner, ERP)



Highly accurate weighing result (system
tolerance $\pm 0.1\%$ of the nominal load),
calibrated with gauged weights



Add up weights (adding memory)



Tare weight by touch or pre-selection




Zero correction



Calculation of individual weights



Digital calibration

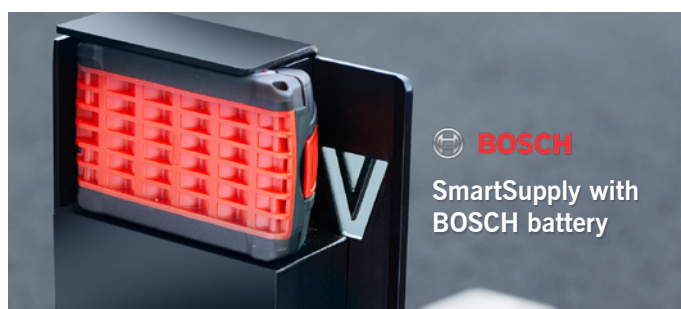

BOSCH

SmartSupply with
BOSCH battery

Type list SmartFork® Scale

Item no.*	Blade length (mm)	ISO**	Load capacity (kg/pair) / Load center (mm)	Outside cross-section (mm)
SCALE25/1000/2A/XXX	1,000	2A	2,500 / 500	120 x 60
SCALE25/1100/2A/XXX	1,100			
SCALE25/1150/2A/XXX	1,150			
SCALE25/1200/2A/XXX	1,200			
SCALE25/1300/2A/XXX	1,300			
SCALE25/1400/2A/XXX	1,400			
SCALE25/1500/2A/XXX	1,500			
SCALE25/1600/2A/XXX	1,600			
SCALE25/1700/2A/XXX	1,700			
SCALE25/1800/2A/XXX	1,800			
SCALE25/1900/2A/XXX	1,900			
SCALE25/2000/2A/XXX	2,000			
SCALE50/1000/3A/XXX	1,000	3A	5,000 / 500	165 x 60
SCALE50/1100/3A/XXX	1,100			
SCALE50/1150/3A/XXX	1,150			
SCALE50/1200/3A/XXX	1,200			
SCALE50/1300/3A/XXX	1,300			
SCALE50/1400/3A/XXX	1,400			
SCALE50/1500/3A/XXX	1,500			
SCALE50/1600/3A/XXX	1,600			
SCALE50/1700/3A/XXX	1,700			
SCALE50/1800/3A/XXX	1,800			
SCALE50/1900/3A/XXX	1,900			
SCALE50/2000/3A/XXX	2,000			

Scope of supply

- ▶ 2 SmartFork® Scale WeighingForks, calibrated with gauged weights

- * XXX in item no. to be replaced by:
BAT = power supply via SmartSupply rechargeable battery
CAB = wired power supply

SmartConnect options

- ▶ **Signal transfer:** Bluetooth, CAN bus
- ▶ **Power supply:** SmartSupply rechargeable batteries (optional 2 additional SmartSupply exchangeable and rechargeable batteries incl. battery charger)
or: wire-guided via electrical system
- ▶ **Signaloutput:** SmartFork® SmartDisplay in industrial housing with RAM-holder

- ** All designs available with other suspensions (e.g. ISO-B, bolt-on forks). Please contact us!

5 good reasons for VETTER:

1. Trust in the competence and experience of Europe's leading fork manufacturer.
2. Quick and independent decisions – that is what VETTER stands for as a family business since 1889.
3. You have access to the largest fork program worldwide, standard or customized, in all sizes, for each and any application and always with an eye to your individual benefit.
4. Take part in revolutionizing the logistics of the future: VETTER is leader in the field of forks for Logistics 4.0.
5. Face-to-face on site for individual service.

Logistics is future
... and VETTER provides the tool:
THE FORK⁺



At your service – worldwide!

Contact us for an offer / further information:

+49 2736 4961-0 · info@smartfork.com

Visit the VETTER website:

www.smartfork.com

Follow VETTER on:



VETTER Industrie GmbH
Carl-Benz-Strasse 45
57299 Burbach / Germany

© VETTER Industrie GmbH 03/2020

All images and graphic charts in this brochure are schematic diagrams. Images do not constitute an integral part of the contract. Offer is subject to change, errors reserved. Passing on to unauthorized third parties is not permitted.