


Technical Information

PEVOPUR® 93° Shore A

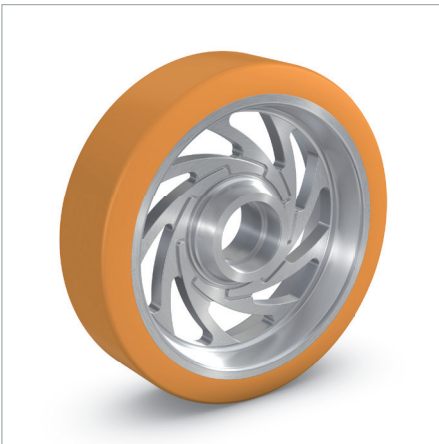

PEVOPUR®

PEVOPUR® is a high-quality polyurethane elastomer which offers good dynamic load capacity, high elasticity, good mechanical wear resistance and good compressive set quality. PEVOPUR® is also significantly more resilient than rubber. Consequently, the material is particularly suitable for applications with lower requirements and is ideally suited for use in tropical climates.

- Medium load capacities
- Medium speeds

| Technical Informationen | Standards | Unit | |
|---|------------|-------------------|-------------|
| Shore hardness A | ISO 7619 | -- | 93 ° (± 3) |
| Density | ISO 1183 | g/cm ³ | approx. 1,2 |
| Elongation at break | DIN 53 504 | % | approx. 500 |
| Stress value at 100% | DIN 53 504 | MPa | 8,0 - 8,5 |
| Rebound resilience | DIN 53 512 | % | 50 - 55 |
| Determination of tear strength | ISO 34 | kN/m | 50 - 55 |
| Compression set 70 h, 23°C | ISO 815 | % | 11 - 12 |
| Abrasion resistance | ISO 4649 | mm ³ | 41 |
| Coefficient of friction (traction) on wet floor at 8000 N | | -- | 0,1 |
| Rolling resistance at 20°C of charge (average) | | % | 0,85 - 0,95 |
| Starting resistance at 20°C of charge (average) | | % | 1,15 - 1,45 |

All values indicated in this table are approximative values resulting from our own tests or information given by our raw material suppliers. The standardised tests refer to special test samples. Therefore these values are not directly applicable to wheels and castors. Furthermore these values change under such influences as temperature, humidity, duration of charge, rate of deformation, etc. For more information please visit www.raedervogel.de.

No legal obligation.